Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IL2006/000322

International filing date: 12 March 2006 (12.03.2006)

Document type: Certified copy of priority document

Document details: Country/Office: US

Number: 60/661,750

Filing date: 15 March 2005 (15.03.2005)


Date of receipt at the International Bureau: 03 May 2006 (03.05.2006)

Remark: Priority document submitted or transmitted to the International Bureau in

compliance with Rule 17.1(a) or (b)



PCT/IL2006 (000322 10 APR 2008

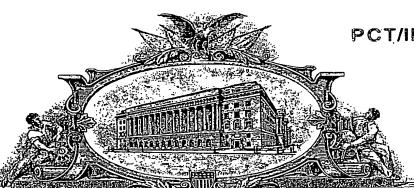

PA 1440687

ANTERIOR STRAIRS DEVIATED BY

TO ALL TO WHOM THESE: PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

March 20, 2006

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/661,750

FILING DATE: March 15, 2005

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US60/661,750*

By Authority of the

Under Secretary of Commerce for Intellectual Property and Director of the United States Patent and Trademark Office

M. K. CARTER
Certifying Officer

\equiv
တ္သ
ಹ
_
<u> </u>
Ġ
Ç
•
$\boldsymbol{\neg}$
_
$\mathbf{\mathcal{C}}$

PTO/SB/16 (8-00) Please type a plus sign (+) inside this box → + Approved for use through 10/31/2002. OMB 0651-0032 U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number. PROVISIONAL APPLICATION FOR PATENT COVER SHEET This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c) INVENTOR(S) Residence (City and either State or Foreign Country) Given Name (first and middle [if any]) Family Name or Surname Room 401, Sungwonvilla BAE Charlie 100-359 Bongehum-dong Gwanakgu, Seoul, Korea separately numbered sheets attached hereto. Additional inventors are being named on the TITLE OF THE INVENTION (280 characters max) NON-CONTACT FEED FOR INTERNAL ANTENNA **CORRESPONDENCE ADDRESS** Direct all correspondence to: Place Customer Number Bar Code Label here **Customer Number** Type Customer Number here OR ABELMAN, FRAYNE & SCHWAB Firm or Х Attorneys at Law Individual Name 150 East 42nd Street Address New York, New York 10017 Address Zip State City (212) 949-9022 Fax (212) 949-9190 Telephone Country ENCLOSED APPLICATION PARTS (check all that apply) Specification (includes drawings) Number of Pages CD(s), Number Number of sheets Drawing(s) Other (specify) Application Data Sheet. See 37 CFR 1.76 METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one) Applicant claims small entity status. See 37 CFR 1.27. **FILING FEE** A check or money order is enclosed to cover the filing fees AMOUNT (\$) The Commissioner is hereby authorized to charge filing fees 01-0035 or credit any overpayment to Deposit Account Number: \$200.00 Payment by credit card. Form PTO-2038 is attached. The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government. No. Yes, the name of the U.S. Government agency and the Government contract number are: March 15, 2005 Date Respectfully sub REGISTRATION NO. SIGNATURE 24,156 Jay S. Cinamon (if appropriate) TYPED or PI 206,915

TELEPHON USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

Docket Number:

STATEMENT OF FILING BY EXPRESS MAIL 37 C.F.R. § 1.10 This correspondence is being deposit with the United States Postal Service on March 15, 2005 in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number ER 842 050 588 US addressed to the Commissioner for Patents P.O. Box 1450, Alexandria, VA 22313-1450.

PROVISIONAL APPLICATION COVER SHEET Additional Page

PTO/SB/16 (8-00)

Approved for use through 10/31/2002. OMB 0551- 0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

	Docket Number	206,915	Type a plus sign (+) inside this box →	+	
INVENTOR(S) APPLICANT(S)					
Residence					
Given Name (first and middle (if any)	Family or Surname YONA	(City and either	(City and either State or Foreign Country) 314/4 Hashita Street		
Haim	IONA	Tiberias 14221	Tiberias 14221		
		Israel			
Snir	AZULAY	24 Gordon Street		:	
		Tiberias 14221 Israel			
l l		isiaci			
				ļ	
l					
Į į	İ				
]					
[·					
Į į					
٠.					
1					
1					
j i					
	[
1					
1	1				
I	\				
Į.					
		1			
	}				
}					
1					
i					
1			·		
		1			
1					

Number __2_ of __2_

SPECIFICATION

- A. Title/Subject Matter of the Invention: Non-contact feed for internal antenna
- B. Persons Who Contributed to or Worked on the Invention: Charlie (Eun-gyu) Bae, Haim Yona and Snir Azulay.
- C. Purpose of the invention: To create a small, high efficiency, cost effective internal antenna with broadband coverage. The antenna would perform well in single as well as multi-band implementations.
- D. A summary of invention: How does the present invention solve the problem; what are the differences between this solution and the prior solutions; and what are the advantages provided by the invention:


Multi-band Inverted F Antennas (IFA, PIFA etc) designs tend to be physically large and lack sufficient bandwidth, especially in the low bands. Folded Monopole Antennas (FMA) have high efficiency even in small multi-band designs, but also lack sufficient bandwidth. Dielectrically excited antennas solves the size and bandwidth issues, but at a significant cost due to expensive dielectric components.

U.S. Patent 5,434,579 (Kagoshima et al) describes a non-contact feeding structure for a PIFA, using a dielectric substrate between the ground plane and capacitive feeding plate. The size of the capacitive plate is used for impedance matching.

In the invention described here, we use a variation of the capacitive feeding structure to create a broadband antenna that does not necessarily include a ground plane beneath the radiating element. Further, improved specific band response can be obtained by using radiating slots in the conductive element.

This inventions' capacitive feeding structure does NOT require a dielectric substrate between it and the ground-plane. We call it a Simple Capacitive Feed (SCF)

E. Description of the invention

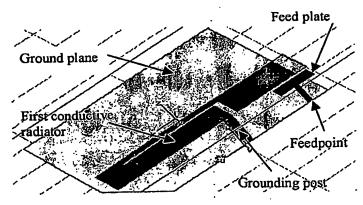

radiating element to the ground plane.

The antenna consists of a first conductive radiating element generally located above a conductive ground plane, but not necessarily fully overlapping with the ground plane. A grounding post connecting the first conductive

BEST AVAILABLE COPY

A feed plate element placed between the first conductive radiating element and ground plane connected directly to the feedpoint of the device for the purpose of capacitively feeding the first conductive radiating element. There is no need for a dielectric substrate between the feed plate element and the ground plane or the first conductive radiating element, though one can be used to reduce the physical size. The size of the feed plate element and its distance to the first conductive radiating element can be changed to give correct impedence matching. Choice of material in between the feed plate element and the first conductive radiating element also affect the capacitive feeding structure created.

Implementation of first conductive radiating element may or may not utilize radiating and tuning slots.

First possible implementation is a "loop" antenna where the SCF capacitive feed is on one end of the first conductive radiating element, the ground post is on the far end of the first conductive radiating element, with the loop bending parallel to itself creating a slot that also radiate at specific bands. The ground plane may or may not be fully parallel to and beneath the first conductive radiating element. The first conductive radiating element may or may not include tuning flaps

Second possible implementation utilizes a more traditional Planar structure where the SCF capacitive feed and the grounding post are located near each other. The implementation may or may not include radiating and tuning slots or tuning flaps, and may or may not have a ground plane fully beneath the first conductive elment.

F. Differences Between Invention and Other Systems or Methods:

In the invention described here, we use a variation of the capacitive feeding structure to create a broadband antenna that does not necessarily include a ground plane beneath the radiating element. Further, improved specific band response can be obtained by using radiating slots in the conductive element.

This inventions' capacitive feeding structure does NOT require a dielectric substrate between it and the ground-plane. We call it a Simple Capacitive Feed (SCF).

One embodiment of the invention, in contrast to the standard PIFA and/or prior art antennas, feeds the antenna at the point of high impedance. The benefit of this construction is that the bandwidth of the antenna is significantly increased and the overall size of the antenna is smaller.

G. Prior Art:

US 5434579: Inverted F antenna with non-contact feeding

US 5764190: Capacitively loaded PIFA

US 6680705: Capacitive feed integrated multi band antenna

BEST AVAILABLE COPY

H. Typically in PIFA there is ground everywhere underneath the antenna element. In this design it might be the case, but most likely some of the ground is removed.

Typically in PIFA the feed point and ground are physically close together. In this design, this is the case concerning the ground plane. However concerning to antenna element, the feed point is nearly the other end of the antenna element (high impedance point). Because this arrangement the feed element does act also as a matching component. (A small capacitor parallel to high impedance can bring the real part of the impedance down -effect between the feed plate and ground.

The reactance of the feed capacitor -effect between feed plate and the antenna elementand the reactance of feed line are used to cancel the remaining reactance.) Of course an additional external matching circuit can be added.

The structure exhibits a rather long and thin slot to the antenna element, because the feed and ground connections are close each others, but still in opposite ends of the antenna element.

BEST AVAILABLE COPY